


CONCRETE ADJUSTING RINGS AS REQUIRED. MORTAR BETWEEN CASTING, CONCRETE ADJUSTING RINGS, AND STRUCTURE (NON-SHRINKING GROUT REQ.). INSTALL MINIMUM NUMBER OF RINGS THROUGH USE OF 2", 6", AND 1' ADJUSTING RINGS (2' MAX. HEIGHT).

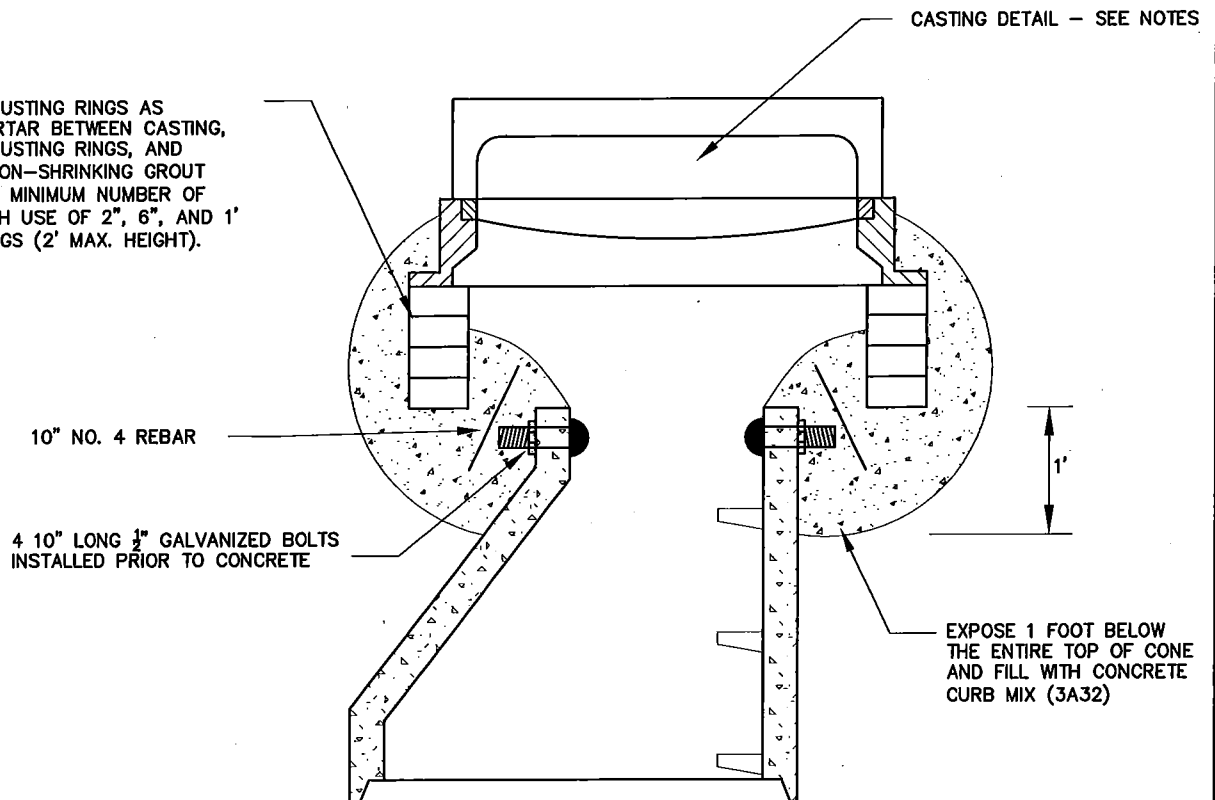

SECTION A-A

NOTES:

BULKHEAD STYLE CURB:
CASTING SHALL BE A NEENAH R-3067-V OR NEENAH R-3067-VB.

BULKHEAD STYLE CURB, BIKE LANES:
CASTING SHALL BE A NEENAH R-3067-L.

SURMOUNTABLE STYLE CURB:
CASTING SHALL BE A NEENAH R-3501-TR OR TL. AT LOW POINTS, CASTING SHALL BE A NEENAH R-3501-TB.



CITY OF EDINA
ENGINEERING
& PUBLIC
WORKS
DEPTS.

RETROFIT DRAINAGE STRUCTURE

David A. Miller
APPROVED: CITY ENGINEER

REVISED:
01-16

STANDARD
PLATE
210